


MARINE GENERATOR SPECIFICATIONS

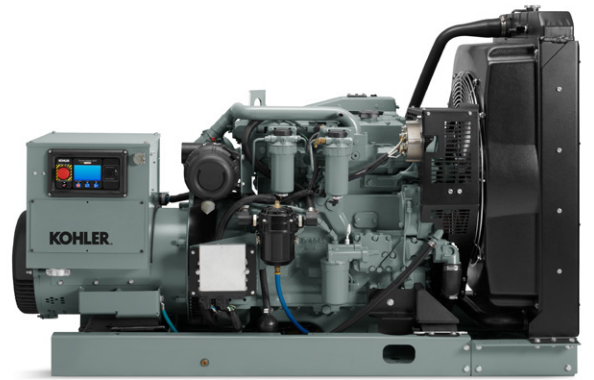

KOHLER[®]
IN POWER. SINCE 1920.

Generator Model*	kW†	Hz	Cylinder	RPM	Phase	Voltage	Amps	Length x Width x Height mm (in)		Weight (Wet) kg (lb)		
								U – Unhoused / R – Radiator				
40EOZCJ	40	60	4	1800	3	120 / 208	139	U – 1524 (60) x 722 (28.4) x 960 (37.8) R – 1858 (73.2) x 827 (32.6) x 1265 (49.8)	U – 935 (2060) R – 957 (2110)†			
						120 / 240	120					
						1	120 / 240			150		
							127 / 220			131		
						3	139 / 240			120		
							277 / 480			60		
33EFOZCJ	33	50	4	1500	3	110 / 190	125					
							110 / 220			108		
						1	115 / 230			143		
							220 / 380			63		
						3	230 / 400			60		
							240 / 416			57		
40EFOZCJ	40	50	4	1500	3	110 / 190	152	U – 1549 (60.9) x 738 (29) x 961 (37.8) R – 1884 (74.2) x 827 (32.5) x 1265 (49.8)	U – 971 (2140) R – 993 (2190)†			
							110 / 220			131		
						1	115 / 230			174		
							220 / 380			76		
						3	230 / 400			72		
							240 / 416			69		
50EFOZCJ	50	50	4	1500	3	110 / 190	190			U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1005 (2216) R – 1028 (2266)†	
							110 / 220					164
						1	115 / 230					196
							220 / 380					95
						3	230 / 400					90
							240 / 416					87
55EOZCJ	55	60	4	1800	3	120 / 208	191	U – 1549 (60.9) x 738 (29) x 961 (37.8) R – 1884 (74.2) x 827 (32.5) x 1265 (49.8)	U – 982 (2164) R – 1004 (2214)†			
							120 / 240					165
						1	120 / 240					221
							127 / 220					180
						3	139 / 240					165
							277 / 480					83
45EFOZCJ	45	50	4	1500	3	110 / 190	171			U – 1549 (60.9) x 738 (29) x 961 (37.8) R – 1884 (74.2) x 827 (32.5) x 1265 (49.8)	U – 982 (2164) R – 1004 (2214)†	
							110 / 220					148
						1	115 / 230					196
							220 / 380					86
						3	230 / 400					79
							240 / 416					71
65EOZCJ	65	60	4	1800	3	120 / 208	226	U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1016 (2240) R – 1039 (2290)†			
							120 / 240					195
						1	120 / 240					221
							127 / 220					213
						3	139 / 240					195
							277 / 480					98
55EFOZCJ	55	50	4	1500	3	110 / 190	209			U – 1606 (63.2) x 738 (29) x 961 (37.8) R – 1941 (76.4) x 827 (32.5) x 1265 (49.8)	U – 1016 (2240) R – 1039 (2290)†	
							110 / 220					181
						1	115 / 230					217
							220 / 380					105
						3	230 / 400					95
							240 / 416					89
80EOZCJ	80	60	4	1800	3	120 / 208	278	U – 1657 (65.2) x 753 (29.6) x 999 (39.3) R – 1992 (78.4) x 890 (35) x 1277 (50.3)	U – 1148 (2530) R – 1179 (2600)†			
							120 / 240					241
							127 / 220					262
							139 / 240					241
							277 / 480					120
							110 / 190					266
70EFOZCJ	70	50	4	1500	3	110 / 220	230			U – 1657 (65.2) x 753 (29.6) x 999 (39.3) R – 1992 (78.4) x 890 (35) x 1277 (50.3)	U – 1148 (2530) R – 1179 (2600)†	
							220 / 380					133
							230 / 400					126
							240 / 416					121
							120 / 208					343
							120 / 240					298
99EOZCJ	99	60	4	1800	3	127 / 220	325	U – 1732 (68.2) x 753 (29.6) x 999 (39.3) R – 2067 (81.3) x 890 (35) x 1277 (50.3)	U – 1243 (2740) R – 1275 (2810)†			
							139 / 240					298
							277 / 480					149
							110 / 190					304
							110 / 220					262
							220 / 380					152
80EFOZCJ	80	50	4	1500	3	230 / 400	144			U – 1732 (68.2) x 753 (29.6) x 999 (39.3) R – 2067 (81.3) x 890 (35) x 1277 (50.3)	U – 1243 (2740) R – 1275 (2810)†	
							240 / 416					139
							120 / 208					434
							120 / 240					376
							127 / 220					410
							139 / 240					376
125EOZCJ	125	60	6	1800	3	277 / 480	188	U – 2068 (81.4) x 893 (35.2) x 1003 (39.5) R – 2466 (97.1) x 1129 (44.5) x 1275 (50.2)	U – 1515 (3340) R – 1578 (3478)†			
							110 / 190					380
							120 / 208					347
							110 / 220					328
							220 / 380					190
							230 / 400					180
100EFOZCJ	100	50	6	1500	3	240 / 416	173			U – 2068 (81.4) x 893 (35.2) x 1003 (39.5) R – 2466 (97.1) x 1129 (44.5) x 1275 (50.2)	U – 1515 (3340) R – 1578 (3478)†	
							120 / 208					520
							120 / 240					451
							127 / 220					492
							139 / 240					451
							277 / 480					226
150EOZCJ	150	60	6	1800	3	110 / 190	474	U – 2091 (82.3) x 893 (35.2) x 1003 (39.5) R – 2498 (98) x 1129 (44.5) x 1275 (50.2)	U – 1551 (3419) R – 1613 (3557)†			
							120 / 208					433
							110 / 220					409
							220 / 380					237
							230 / 400					225
							240 / 416					217
125EFOZCJ	125	50	6	1500	3	120 / 208	695			U – 2091 (82.3) x 893 (35.2) x 1003 (39.5) R – 2498 (98) x 1129 (44.5) x 1275 (50.2)	U – 1551 (3419) R – 1613 (3557)†	
							120 / 240					602
							127 / 220					657
							139 / 240					602
							277 / 480					301
							110 / 190					666
200EOZCJ	200	60	6	1800	3	110 / 220	575	U – 2490 (98) x 970 (38.2) x 1086 (42.8)	U – 2067 (4558)			
							220 / 380					333
							230 / 400					316
							240 / 416					304
							120 / 208					695
							120 / 240					602
175EFOZCJ	175	50	6	1500	3	127 / 220	657			U – 2490 (98) x 970 (38.2) x 1086 (42.8)	U – 2067 (4558)	
							139 / 240					602
							277 / 480					301
							110 / 190					666
							110 / 220					575
							220 / 380					333

*Commercial models are unhoused. †kW rating varies by voltage. Consult the generator spec sheet for more detail.

AMERICAS/CARIBBEAN
920-565-3381
800-544-2444
Fax 920-459-1646

CHINA
+86 21 26062169
+86 400 1808 900

**EUROPE
MIDDLE EAST
AFRICA**
+31 168 331630

ASIA-PACIFIC
+65 6264 6422
Fax +65 6264 6455

INDIA
+91 80 42867000
+91 80 23615972

**NEW ZEALAND
AUSTRALIA**
+61 88 29 02100

KOHLERPOWER.COM